






**CONSTANT CURRENT LED DRIVER
24W TUBE LIGHT
CODE :24W-280mA-MT9514DF HPF**

Key Features

-  **HIGH VOLTAGE WITHSTAND 440V**
-  **4KV SURGE PROTECTION**

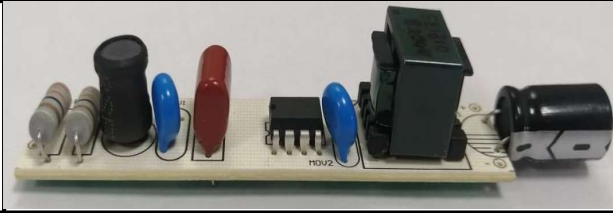

ISOLATION	NON ISOLATED
OPERATING VOLTAGE RANGE	100-300VAC
RATED VOLTAGE	220-240VAC
LINE FREQUENCY	50Hz
MAXIMUM INPUT POWER	24W
TYPICAL INPUT CURRENT AT 230VAC	105mA
POWER FACTOR	>0.95
CURRENT THD	<15%
OUTPUT VOLTAGE RANGE	63-75V
OUTPUT CURRENT	300mA
DRIVER EFFICIENCY	>89%
SHORT CIRCUIT PROTECTION	YES
OPEN CIRCUIT PROTECTION	YES
CURRENT FOLDBACK AT LOW VOLATAGE	YES
HIGH VOLTAGE CUT	380V±25 AND RESTART AT 320V±25

**WITH LONG
LIFE
ELECTROLYTIC
CAPACITORS
UPTO 10000
HOURS**

POWERED BY

